

Wireless 2D Pocket Scanner

- MS926P -



User's Manual

Version 1.1

Change Log

Date	Change Description	Version
20190401	first published version	1.0
20190625	Update 1.7	1.1

Preface

About This Manual

Thank you for purchasing the unitech product.

This manual explains how to install, operate and maintain our product.

No part of this publication may be reproduced or used in any form, or by any electrical or mechanical means, such as photocopying, recording, or information storage and retrieval systems, without permission in writing from the manufacturer. The material in this manual is subject to change without notice. All product and company names are trademarks, service marks, or registered trademarks of their respective owners.

Regulatory Compliance Statements



FCC Warning Statement

This device has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference with radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference with radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
1. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
 2. This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. To maintain compliance with FCC RF exposure requirements, avoid direct contact to the transmitting antenna during transmitting.
 3. Any changes or modifications (including the antennas) made to this device that are not expressly approved by the manufacturer may void the user's authority to operate the equipment.

Operation on the 5.15 - 5.25GHz frequency band is restricted to indoor use only. The FCC requires indoor use for the 5.15-5.25GHz band to reduce the potential for harmful interference to co-channel Mobile Satellite Systems. Therefore, it will only transmit on the 5.25-5.35 GHz, 5.47-5.725 GHz and 5.725 - 5.850 GHz band when associated with an access point (AP).

FCC Label Statement

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

RF Radiation Exposure Statement

For body contact during operation, this device has been tested and meets FCC RF exposure guidelines when used with an accessory that contains no metal and that positions the handset a minimum of 1.5 cm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

Canadian Compliance Statement

This Class B Digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations.

Cet appareil numérique de la classe B respecte les exigences du Règlement sur le matériel brouilleur du Canada.

European Conformity Statement

unitech Electronics co., Ltd herewith declares that the unitech product is in compliance with the essential requirements and all other provisions of the RED 2014/53/EU directive, the EMC 2014/30/EU directive and the Low Voltage 2014/35/EU directive.

The declaration of conformity is available for download at :

<https://portal.unitech.eu/public/Safetyregulatorystatement>

CE RF Exposure Compliance

This device meets EU requirements (2014/53/EU) on the limitation of exposure of the general public to electromagnetic fields by way of health protection.

For body-worn operation, this device has been tested and meets the ICNIRP guidelines and the European Standard EN 62209-2, for use with dedicated accessories, SAR is measured with this device at a separation of 0.5 cm to the body, while transmitting at the highest certified output power level in all frequency bands of this device. Use of other accessories which contain metals may not ensure compliance with ICNIRP exposure guidelines.

CE Mark Warning




This equipment complies with the requirements of Directive 2014/53/EU of the European Parliament and Commission from 24 May, 2014 governing Radio and Telecommunications Equipment and mutual recognition of conformity.

RoHS Statement



This device conforms to RoHS (Restriction of Hazardous Substances) European Union regulations that set maximum concentration limits on hazardous materials used in electrical and electronic equipment.

Waste electrical and electronic equipment (WEEE)



unitech has set up a policy and process to meet the EU directive 2002/96/EC and update 2003/108/EC concerning electronic waste disposal.

For more detailed information of the electronic waste disposal of the products you have purchased from unitech directly or via unitech's resellers, you shall either contact your local supplier or visit us at :

<https://portal.unitech.eu/public/WEEE>

Taiwan NCC Warning Statement

低功率電波輻射性電機管理辦法

第十二條：經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條：低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

低功率射頻電機需忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

注意事項：

1. 使用過度恐傷害視力。
2. 使用30分鐘請休息10分鐘；2歲以下幼兒不看螢幕，2歲以上每天看螢幕不要超過1小時。
3. 減少電磁波影響，請妥適使用。

Laser Information

The unitech product is certified in the U.S. to conform to the requirements of DHHS/CDRH 21CFR Subchapter J and to the requirements of IEC 825-1. Class II and Class 2 products are not considered to be hazardous. The unitech product contains internally a Visible Laser Diode (VLD) whose emissions do not exceed the maximum limits as set forth in the above regulations. The scanner is designed so that there is no human access to harmful laser light during normal operation, user maintenance or prescribed service operations.

The laser safety warning label required by the DHHS/IEC for the unitech product's optional laser scanner module is located on the memory compartment cover, on the back of the unit.

* Laser information only applies to the products with laser components.

CAUTION! Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous laser light. Use of optical instruments with the scanner, including binoculars, microscopes, and magnifying glasses, will increase eye damage. This does not include eyeglasses worn by the user.

LED Information

The unitech product contains LED indicator(s) or LED ring whose luminance is not harmful to human eyes during normal operation, user maintenance or prescribed service operations.

*LED information only applies to the products with LED components.

Battery Notice

1. To guarantee optimal performance, it is recommended that rechargeable batteries be replaced every year, or after 500 charging cycles are completed. It is normal for the battery to balloon or expand after one year or 500 cycles. Although it does not cause damage, it cannot be used again and must be disposed of according to the location's safe battery disposal procedures.
2. If a battery performance decreases more than 20%, the battery is at the end of its life cycle. Stop use and ensure the battery is disposed of properly.
3. The length of time that a battery lasts depends on the battery type and how the device is used. Conserve the battery life by doing the following:
 - Avoid fully uncharging the battery because this places additional strain on it. Several partial uncharges with frequent charges are better than a fully uncharged battery. Charging a partially charged battery does not cause harm to the unit.
 - Keep the battery cool. Avoid hot vehicles. For prolonged storage, keep the battery at a 40% charge level.
 - Do not leave the battery uncharged and unused for an extended period of time, the battery will wear out and the longevity of the battery will be at least half of one with frequent charges.
4. Protect battery life by not over or under charging the battery.
5. Please do not leave battery unused for long time without charging it. Despite unitech's safety precautions, the battery pack may begin to change shape. If so, stop using it immediately. Please check to see if you are using a proper power adapter to charge the battery or contact your service provider for service.
6. If you cannot charge the battery after it has been idle for an extended period of time and it begins to heat up, please do not try to charge it. It may not be functional anymore.
7. Please only use the original battery from unitech. Using a third party battery can damage our products. Please note that when such damage occurs, it is not covered by your warranty.

CAUTION!

- RISK OF EXPLOSION IF BATTERY IS REPLACED INCORRECTLY. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.
- 如果更換不正確之電池行事會有爆炸的風險
請依製造商說明書處理用過之電池
- 如果更換不正確之電池行事會有爆炸的風險
請依製造商說明書處理用過之電池

Battery charge notice

It is important to consider temperature when the battery pack is charging. Charging is most efficient at normal room temperature or in a slightly cooler environment. It is essential that batteries are charged within the stated range of 0°C to 40°C. Charging batteries outside of the specified range could damage the batteries and shorten their life cycle.

CAUTION! Do not charge batteries at a temperature lower than 0°C. This will and make the batteries unstable and dangerous. Please use a battery temperature detecting device for a charger to ensure a safe charging temperature range.

CAUTION! To ensure the unit working properly, please keep all connectors away from the contaminants staying inside of them such as dust, grease, mud, and water. The negligence may cause the unit with no communication, short circuited, overheated and so on.

CAUTION! If the connector is damaged, please ensure the connector is being fully repaired before use the unit to avoid causing short circuited.

Storage and safety notice

Although charged batteries may be left unused for several months, their capacity may be depleted due to build up of internal resistance. If this happens, they will require recharging prior to use. Batteries may be stored at temperatures between -20°C to 60°C, however they may deplete more rapidly at higher temperatures. It is recommended to store batteries at room temperature.

** The message above only applies to the usage of the removable batteries.
For the products with non-removable batteries / without batteries, please refer to the specification of each product.*

Product Operation and Storage Notice

The unitech product has applicable operation and storage temperature conditions. Please follow the limitation of suggested temperature conditions to avoid failure, damage or malfunction.

** For applicable temperature conditions, please refer to the specification of each product.*

Adapter Notice

1. Please do not leave the power adapter in the socket when it is not connected to your unitech product for charging.
2. Please remove the power adapter when the battery is fully recharged.
3. The bundled power adapter that comes with your unitech product is not meant to be used outdoors. An adapter exposed to water or rain, or a very humid environment can cause damage to both the adapter and the product.
4. Please only use the bundled power adapter or same specification of adapter to charge your unitech product. Using the wrong power adapter can damage your unitech product.

** The message above only applies to the product connected to the adapter.
For the products without using the adapters, please refer to the specification of each product.*

Hearing Damage Warning

Zx.3 Warning

The warning shall be placed on the equipment, or on the packaging, or in the instruction manual and shall consist of the following:

- the symbol of Figure 1 with a minimum height of 5 mm; and
- the following wording, or similar :

To prevent possible hearing damage, do not listen at high volume levels for long periods.



Figure 1 – Warning label (IEC 60417-6044)

Alternatively, the entire warning may be given through the equipment display during use, when the user is asked to acknowledge activation of the higher level.

Worldwide Support

unitech's professional support team is available to quickly answer questions or assist with technical-related issues. Should an equipment problem occur, please contact the nearest unitech regional service representative.

For complete contact information please visit the Web sites listed below:

<p>Taipei, Taiwan – Headquarters</p> <p>Tel: +886-2-89121122</p> <p>E-mail: info@hq.ute.com</p> <p>Address: 5F, No. 136, Lane 235, Baoqiao Road, Xindian District, New Taipei City 231, Taiwan (R.O.C.)</p> <p>Website: http://www.ute.com</p>	<p>Europe</p> <p>Tel: +31-13-4609292</p> <p>E-mail: info@eu.ute.com</p> <p>Address: Kapitein Hatterasstraat 19, 5015 BB, Tilburg, the Netherlands</p> <p>Website: http://eu.ute.com</p>
<p>China</p> <p>Tel: +86-59-2310-9966</p> <p>E-mail: info@cn.ute.com</p> <p>Address: Room401C, 4F, RIHUA International Mansion, Xinfeng 3rd Road, Huoju Hi-tech District, Xiamen, Fujan , China</p> <p>Website: http://cn.ute.com</p>	<p>Japan</p> <p>Tel: +81-3-35232766</p> <p>E-mail: info@jp.ute.com</p> <p>Address: Kayabacho Nagaoka Building 8F.,1-5-19 Shinkawa, Chuo-Ku, Tokyo, 104-0033, Japan</p> <p>Website: http://jp.ute.com</p>
<p>Asia & Pacific / Middle East</p> <p>Tel: +886-2-27911556</p> <p>E-mail: info@apac.ute.com info@india.ute.com info@mideast.ute.com</p> <p>Address: 4F., No. 236, ShinHu 2nd Rd., NeiHu Chiu, 114, Taipei,Taiwan</p> <p>Website: http://apac.ute.com / http://mideast.ute.com</p>	<p>Latin America</p> <p>Tel: +52-55-5171-0528</p> <p>E-mail: info@latin.ute.com</p> <p>Address: 17171 Park Row, Suite 210 Houston, TX 77084USA (Rep.)</p> <p>Website: http://latin.ute.com</p>
<p>North America</p> <p>Tel: +1-714-8926400</p> <p>E-mail: info@us.ute.com / info@can.ute.com</p> <p>Address: 6182 Katella Ave, Cypress, CA 90630, USA</p> <p>Website: http://us.ute.com</p>	<p>Please scan QR Code to visit us :</p> 

Warranty Policy

The items covered under the unitech Limited Warranty are free from defects during normal use.

The warranty period is varied from each country. Please consult with your supplier or unitech local office for actual length of warranty period to your purchased product.

Warranty becomes void if equipment is modified, improperly installed or used, damaged by accident or neglect, or if any parts are improperly installed or replaced by the user.

Table of Contents

Preface.....	i
About This Manual	i
Regulatory Compliance Statements	i
Laser Information	vi
LED Information	vi
Battery Notice.....	vii
Adapter Notice.....	x
Hearing Damage Warning	x
Worldwide Support	xi
Warranty Policy	xii
Chapter 1 - Overview.....	1
1.1 Package	1
1.2 Scanner Detail.....	2
1.3 Specifications	3
1.4 Getting Started	6
1.5 Battery Charging	7
1.6 LED Indicator / Beeper Sequence	8
1.7 Display Menu Tree	9
Chapter 2 - Installation.....	16
2.1 Scanner Type	16
Chapter 3 – Symbology	18
3.1 All symbologies.....	18
3.2 Enable/Disable 1D / 2D Symbologies.....	18
3.3 1D.....	19
3.4 2D.....	64
Chapter 4 – Command Settings.....	72
4.1 Operation Mode.....	72
4.2 System setting.....	73
4.3 RF Config.	75
4.4 Data & Memory	76

4.5 Data Sending Block Delay	77
4.6 HID Keyboard Character Delay	78
4.7 Beep & Vibration & Indicators.....	80
4.8 Data Terminator	83
4.9 1:1 / 1:N Checking Indicators	84

Chapter 1 - Overview

1.1 Package

Please make sure the following contents are in the MS926P gift box. If something is missing or damaged, please contact your unitech representative.

The standard package contents




- MS926P Scanner
- Quick Reference Guide
- Micro USB to USB Cable
- Hand Strap
- USB Dongle

Optional accessories

- 1-Slot Charging cradle
- 5-Slot Charging cradle
- USB Power Adapter

NOTE: ● The barcode with an asterisk (*) which appears in the following chapters indicates that it is the default option for the corresponding setting.

1.2 Scanner Detail

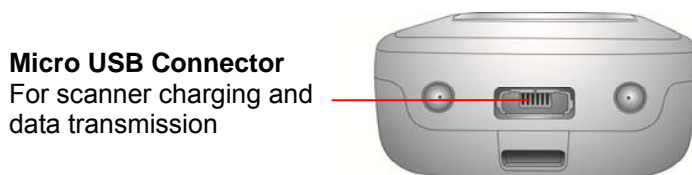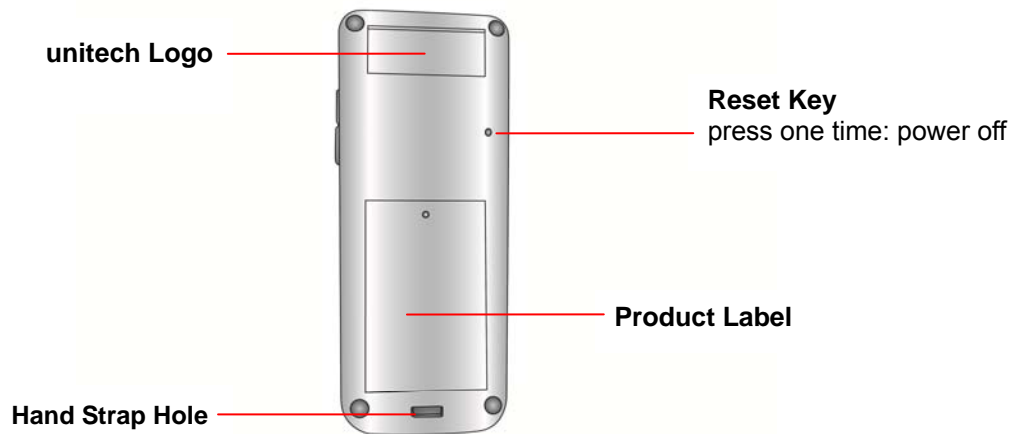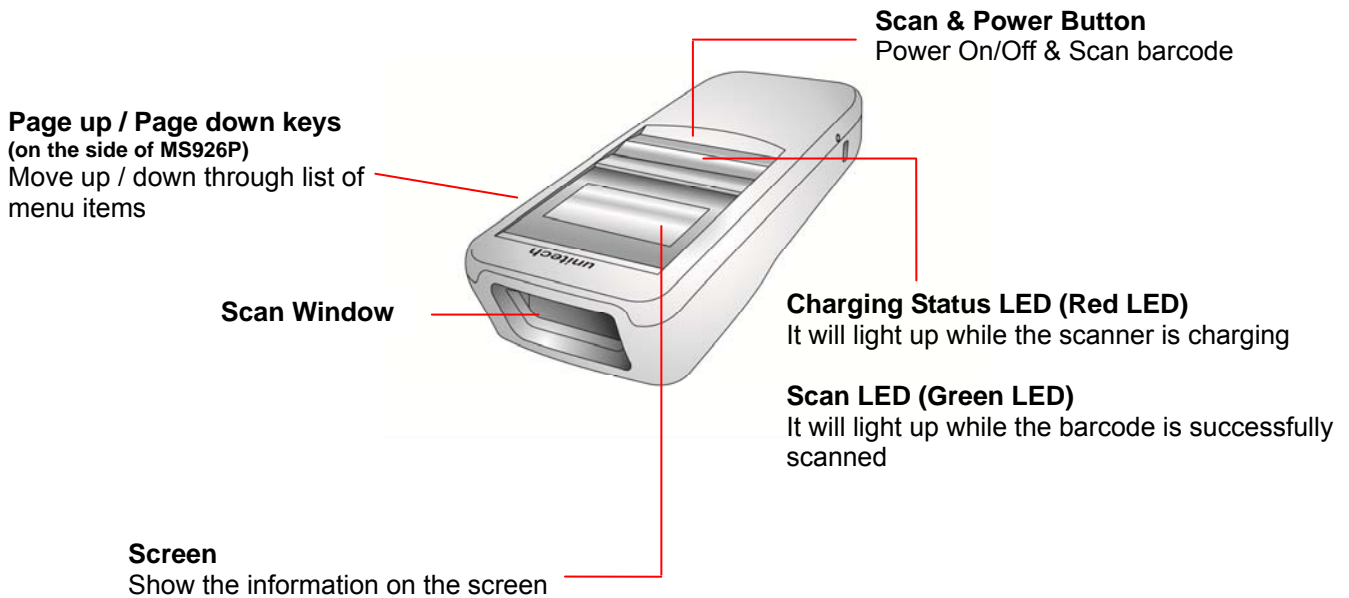

1.3 Specifications

System				
Display	1" OLED, 128 x 64			
OS	Proprietary, Connect to host with Windows			
Memory	64 Kbytes SRAM / 2 MB Flash ROM			
Key	3 Keys: Page Up, Page Down, Scan with power on/off feature			
Optical & Performance				
Receiving Device	752×480 CMOS			
Illumination & Aiming	Red LED 625nm±10nm, Laser diode 650nm			
Aiming	Laser diode 650nm			
Ambient light	0~100,000 lux			
Symbol Contrast	≥20%			
Roll Angle	360 degrees			
Field of View	Horizontal 36°, Vertical 23°			
Skew Angle	±55			
Pitch Angle	±55			
Depth of Field (DOF PCS=80%)	Symbology	Density	Near	Far
	EAN-13	13 mils	6.0 cm	29 cm
	Code 39	5 mils	5.5 cm	16.5 cm
	PDF417	6.7 mils	5.5 cm	13.5 cm
	Data Matrix	10 mils	5.5 cm	13 cm
	QR	15 mils	4.5 cm	17.5cm

Environmental	
ESD Protection	Functional after 8K Contact and 12K Air
Mechanical Shock	1.5m onto concrete (scanner only)
IP Rate	IP42
Operating Temperature	0°C to 50°C
Storage Temperature	-30°C to 70°C
Relative Humidity	95% non-condensing
Functionality (Symbologies)	
1D Code	Code 128, EAN-13, EAN-8, Code 39, UPC-A, UPC-E, Codabar, Interleaved 2 of 5, ITF-6, ITF-14, ISBN, Code 93, UCC/EAN-128, GS1 Databar, Matrix 2 of 5, Code 11, Industrial 2 of 5, Standard 2 of 5, Plessey, MSI-Plessey, etc.
2D Code	PDF417, Data Matrix (ECC200, ECC000, 050, 080, 100, 140), QR Code, Chinese Sensible Code
Operation Mode	Trigger mode, Presentation mode, Auto mode, Batch mode, Wedge mode
Electrical	
Operation Voltage	DC 3V to 5V
Current Consumption	Operate: 300mA, Standby: 70mA
Battery Type	Rechargeable Li-ion battery
Battery Capacity	680 mAh
Battery Charging time	Fully charged in about 4 hours
Operating Time	9 hours at condition of 1 scan/5 sec

Communication	
Radio Frequency	Unlicensed 2.4GHz
Protocol	Wireless SPP & HID profiles
Range	Up to 10M (Open space)
Host Interface supported	Micro USB
Mechanical	
Scanner Dimension	36.9mm x 95.9mm x 21.1mm
Scanner Weight	63g
Switch life	10 million times
Regulation Approvals	
CE, FCC, BSMI, VCCI	


1.4 Getting Started

To turn on the scanner, press and hold the **Scan & Power Button** for about 2 seconds. To turn off the scanner, press and hold the **Scan & Power Button** for about 5 seconds.

After powering on, you will see the following screen on the scanner display. The scanner is now under standby mode. Now you can scan the desired barcode or start the BT pairing mode.

The standby display will show the current **Battery Status**, **Scanner Type**, **Operation Mode**, and **Time**.

The aiming beam can be **centered** over the bar code with any direction and have the proper alignment for a good read. (see example below)

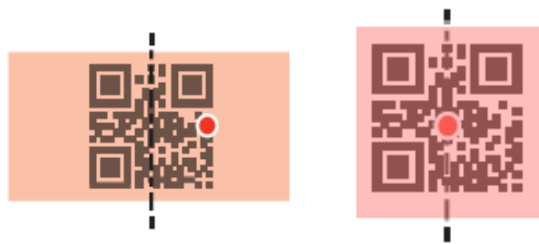


1.4.1 Connect Dongle to Host

Plug the USB Dongle to a free USB port of a host computer. The MS926P is now ready to use.



1.5 Battery Charging

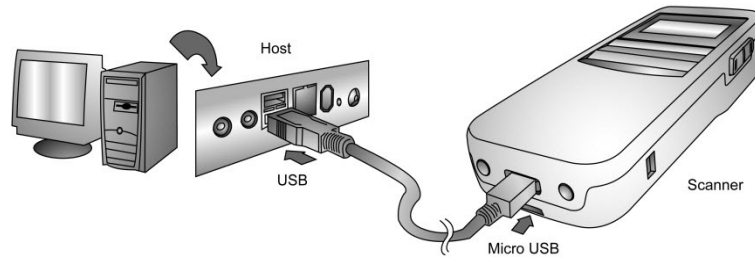

Insert the Micro USB connector into the port on the scanner and the standard USB connector of the USB cable into a USB port on the host PC.

1.6 LED Indicator / Beeper Sequence

Division	Action/Status	LED for Barcode reading & Communication	LED for Battery status	Beeper / Sound
Power On		Green & Red Lights blink once		One High Beep
Auto Power Off	Long press trigger key for 5 seconds			Three short beeps at 15 seconds before power off
USB connection				Low- Medium –High Beeps
USB disconnection				High- Medium –Low Beeps
Barcode reading	Wedge & Auto (When BT Connect)	Green Light blinks once		One Beep
	Batch	Green Light blinks once		One short Beep
	Wedge & Auto (When BT Disconnect)	Green Light blinks once		One short Beep
Data sent to PC	Data sent to PC successfully (Batch)	Green Light blinks once		Dee-Du sound
	Fail sent data to PC (Batch)	Red Light blinks once		Dee-Dee-Dee sound
Data delete		Green Light blinks once		
All Data delete		Deleting- Green light always on		
RF connection				Low- Medium –High Beeps
RF disconnection				High- Medium –Low Beeps
Low Battery Alarm (<10%)	(USB charging cable disconnected)		Blinking Red Light	
Battery charging	(USB charging cable connected)		Red light always on	
Battery Fully charged	(USB charging cable connected)		Green light always on	

1.7 Display Menu Tree

To enter main menu of MS926P, press and hold Page Down key and then press Page Up key for 5 seconds. (During one handed operation, you can press the area in between Page Down key and Page Up key to enter the main menu.)

You will see the following screen on the MS926P display. Now you can use **Page Up/Down button** to scroll through the menu and use **Scan button** to make your selection.

Top Menu	Sub Menu Level 1	Sub Menu Level 2/Options/Result	Options/Result	Default Setting
General Setting	1. Scanner Type	1.1 RF HID	n/a	RF HID
		1.2 USB SPP		
		1.3 RF SPP		
	2. Operation Mode	2.1 Wedge Mode	n/a	Auto Mode
		2.2 Batch Mode		
		2.3 Auto Mode		
	3. Date/Time	3.1 View Date/Time	Show Date/Time	2014-01-01
		3.2 Set Date/Time	Set Date/Time	08:00:00
		3.3 Time Display	3.3.1 Auto	Auto
			3.3.2 Always	
	3.4 Exit	n/a		
	4. Power Manager	4.1 Power Saving	Disable/30/20/15 /10/5 Sec.	15 Sec.
		4.2 Auto Power Off	Disable/30/20/15 /10/5/3/1 Min.	15 Min.
		4.3 Exit	n/a	
	5. Setup By Label	5.1 Enable	n/a	Enable
5.2 Disable				
6. FAC Default	6.1 Restore to FAC	Save to Selected	No	

Default?

Customer Setting

Top Menu	Sub Menu Level 1	Sub Menu Level 2/Options/Result	Options/Result	Default Setting
		Yes/No		
	7. FW Version	7.1 Show Firmware Version V x.x	n/a	
	8. Serial Number	8.1 Show SERIAL NUMBER XXXXXXXXXX	n/a	n/a
	9. Exit	n/a	n/a	n/a

Top Menu	Sub Menu Level 1	Sub Menu Level 2/Options/Result	Options/Result	Default Setting
Data & Memory	1. View / Edit Buff.	1.1. Show Buffer Data	1.1.1 Exit / Erase/ View	<ul style="list-style-type: none"> ■ If choose Exit, back to DATA/MEMORY Page ■ If choose Erase, delete data ■ If choose View, continue to view the buffer data ■ For Auto/Batch mode, pressing [ENTER]+[Down] / [ENTER]+[UP] keys to view data longer than 3 lines
	2. Erase Buffer	2.1. Erase Buffer Yes/ No	Erase entry if Yes selected	No
	3. Free MEM Space	3.1 Show FREE BUFFER MEM	n/a	

Top Menu	Sub Menu Level 1	Sub Menu Level 2/Options/Result	Options/Result	Default Setting
	4. Data Separator	4.1 CR		CR
		4.2 None		
		4.3 TAB		
		4.4 CRLF		
		4.5 LF		
	5. Sending BlkDly	5.1 Sending BlkDelay 10ms/3 Sec./1 Sec./500 ms./100 ms./50 ms.		10ms
	6. Date/Time Stamp	6.1 DATE STAMP Disable DDMMYYYY DD.MM.YYYY DD/MM/YYYY DD-MM-YYYY MMDDYYYY MM.DD.YYYY MM/DD/YYYY MM-DD-YYYY YYYYMMDD YYYY.MM.DD YYYY/MM/DD YYYY-MM-DD		Disable
		6.2 TIME STAMP Disable/HHMMAM/ HHMM/ HH:MM AM/ HH:MM/HHMMSSAM/ HHMMSS/ HH:MM:SS AM/ HH:MM:SS		Disable
	7. Data Validation	7.1 Disable	Disable /Enable	Disable
		7.2 1:N Checking	CHECKING START POSITION	CHECKING LENGTH

Top Menu	Sub Menu Level 1	Sub Menu Level 2/Options/Result	Options/Result	Default Setting
		7.2 1:1 Checking	CHECKING START POSITION	CHECKING LENGTH
		7.3 Lookup Table	Download Lookup	
	8. Exit	n/a	n/a	n/a

Top Menu	Menu	Result	Default Setting
RF INFO	1. RF Address	1.1 RF MAC ADDR	
	2. RF Remove	2.1 Erase ? YES / NO	
	3. Exit		

Top Menu	Menu	Result	Result	Default Setting	
Beep & Vibrate	1. Beeper Volume	1.1 Medium/ Low/ Mute/ High		Medium	
	2. Vibrator	2.1 Disable/ Enable		Disable	
	3. Indicators	3.1 Good Read		3.1.1 Beeper & Vibrator Beeper / None	Beeper & Vibrator
		3.2 Connection		3.2.1 Beeper & Vibrator Beeper / None	Beeper & Vibrator
		3.3 Button		3.3.1 Beeper & Vibrator Beeper / None	Beeper & Vibrator
		3.4 System Setting		3.4.1 Beeper & Vibrator Beeper / None	Beeper
		3.5 System Warn/ Err		3.5.1 Beeper & Vibrator Beeper / None	Beeper
		3.6 PwrOn		3.6.1 Beeper & Vibrator Beeper / None	Beeper & Vibrator
		3.7 PwrOff Alarm		3.7.1 Beeper & Vibrator Beeper / None	Beeper & Vibrator
		3.8 Checking Pass		3.8.1 1:1 / 1:N Checking Pass Indicator Beeper & Vibrator Beeper / None	Beeper
3.9 Checking Fail		3.9.1 1:1 / 1:N Checking Fail Indicator Beeper & Vibrator Beeper / None	Beeper		

Top Menu	Menu	Result	Result	Default Setting
		3.10 Exit	n/a	n/a
	4. Exit	n/a	n/a	n/a

Top Menu	Menu	Sub Menu	Options
Barcode Setting	1. 1D Barcodes	ON / OFF	2.1 UPC-A
			2.2 UPC-E
			2.3 EAN-8
			2.4 EAN-13
			2.5 CODE 39
			2.6 CODE 128
			2.7 GS1 128
			2.8 I 2 of 5
			2.9 NEC 2 of 5
			2.10 CODE 93
			2.11 Codabar
			2.12 Code 11
			2.13 Matrix 2 of 5
			2.14 ITF-14
			2.15 ITF-16
			2.16 ATM-128
			2.17 ISSN
			2.18 ISBN
			2.19 Industrial 2 of 5
			2.20 Standard 2 of 5
			2.21 MSI PLESSEY
			2.22 PLESSEY

Top Menu	Menu	Sub Menu	Options
			2.23 Exit
	2. 2D Barcodes	ON / OFF	3.1 QR Code
			3.2 PDF 47
			3.3 Data Matrix
			3.4 Chinese Sensible
			3.5 Micro QR
	3.6 Exit		
	3. Exit		n/a

Top Menu	Sub Menu Level 1	Result	Default Setting
HID Keyboard Setting	1. KBD Language	1.1 US English / Japanese / Partial ALT Danish/ ALT Mode/ French / German Italian / Norwegian / Spanish / Swedish/ Swiss/ UK English	US English
	2. KBD Case	2.1 Auto Trace / Upper/ Lower	Auto Trace
	3. KBD ChrDelay	3.1 1ms/ 100ms/ 50ms/ 20ms/ 10ms/ 5ms	1ms
	4. Exit	n/a	n/a


Chapter 2 - Installation

2.1 Scanner Type

Step 1. Scan the barcode on the dongle.



Step 2. Plug the USB Dongle to a free USB port of a host computer.



Step 3. Open a word processing program such as Microsoft Word or Notepad and scan the following barcode. If the word “unitech” appears on the screen you have successfully installed your scanner.



RF HID *



RF SPP



USB SPP



NOTE:

- The MS926P should be recognized as a generic HID device by your host device, similar to a standard keyboard. This allows you to scan into any field you could normally type into.
- If the MS926P is out of RF transmitting range from the host device, it will automatically save any scan data in its buffer memory and automatically upload the scan data to the host when back in RF transmitting range.
- The MS926P can also operate in Batch Mode, where a RF transmitting connection is not required. In Batch Mode, the MS926P saves all scan data in internal memory and then uploads the data when connected to a host. See back page of this guide for more information about modes and settings.

Chapter 3 – Symbology

3.1 All symbologies

If the Disable All Symbologies feature is enabled, the engine will not be able to read any non-programming barcodes except the programming barcodes.

All Symbologies On



All Symbologies Off



3.2 Enable/Disable 1D / 2D Symbologies

3.2.1 Enable/Disable 1D Symbologies

If the Disable 1D Symbologies feature is enabled, the engine will not be able to read any 1D barcodes.

Enable 1D Symbologies



Disable 1D Symbologies



3.2.2 Enable/Disable 2D Symbologies

If the Disable 2D Symbologies feature is enabled, the engine will not be able to read any 2D barcodes.

Enable 2D Symbologies



Disable 2D Symbologies



3.3 1D

Before starting any symbology setting, please scan "**Enter Setup**"

Enter Setup



When finished setting, please scan "**Exit Setup**"

Exit Setup



3.3.1 Code 128

Restore the Factory Defaults of Code 128



Enable Code 128*



Disable Code 128



Set the Minimum
Length for Code 128



Set the Maximum
Length for Code 128



3.3.2 GS1-128 (UCC/EAN-128)

Restore the Factory Defaults of GS1-128



Enable GS1- 128*



Disable GS1-128



Set the Minimum
Length for GS1- 128



Set the Maximum
Length for GS1- 128



3.3.3 AIM-128

Restore the Factory Defaults of AIM-128



Enable AIM-128*



Disable AIM-128



Set the Minimum
Length for AIM-128



Set the Maximum
Length for AIM-128



3.3.4 EAN-8

Restore the Factory Defaults of EAN-8



Enable EAN-8*

Disable EAN-8



3.3.4.1 Transmit Check Digit

EAN-8 is 8 digits in length with the last one as its check digit used to verify the integrity of the data.

Transmit EAN-8 Check
Digit *

Do Not Transmit EAN-8
Check Digit



3.3.4.2 Add-On Code

An EAN-8 barcode can be augmented with a two-digit or five-digit add-on code to form a new one. In the examples below, the part surrounded by blue dotted line is an EAN-8 barcode while the part circled by red dotted line is add-on code.



Enable 2-Digit Add-On Code



Disable 2-Digit Add-On Code *



Enable 5-Digit Add-On Code



Disable 5-Digit Add-On Code*



Enable 2-Digit Add-On Code/ Enable 5-Digit Add-On Code:

The engine decodes a mix of EAN-8 barcodes with and without 2-digit/5-digit add-on codes.

Disable 2-Digit Add-On Code/ Disable 5-Digit Add-On Code:

The engine decodes EAN-8 and ignores the add-on code when presented with an EAN-8 plus add-on barcode. It can also decode EAN-8 barcodes without add-on codes.

3.3.4.3 Add-On Code Required

When EAN-8 Add-On Code Required is selected, the engine will only read EAN-8 barcodes that contain add-on codes.

EAN-8 Add-On Code Required



EAN-8 Add-On Code Not Required *



3.3.4.4 EAN-8 Extension

Disable EAN-8 Zero Extend: Transmit EAN-8 barcodes as is.

Enable EAN-8 Zero Extend:

Add five leading zeros to decoded EAN-8 barcodes to extend to 13 digits.

Enable EAN-8 Zero Extend



Disable EAN-8 Zero Extend*



3.3.5 EAN-13

Restore the Factory Defaults of EAN-13



Enable EAN-13*



Disable EAN-13



3.3.5.1 Transmit Check Digit

Transmit EAN-13 Check
Digit *



Do Not Transmit EAN-13
Check Digit



3.3.5.2 Add-On Code

An EAN-13 barcode can be augmented with a two-digit or five-digit add-on code to form a new one.

Enable 2-Digit Add-On Code/ Enable 5-Digit Add-On Code:

The engine decodes a mix of EAN-13 barcodes with and without 2-digit/5-digit add-on codes.

Disable 2-Digit Add-On Code/ Disable 5-Digit Add-On Code:

The engine decodes EAN-13 and ignores the add-on code when presented with an EAN-13 plus add-on barcode. It can also decode EAN-13 barcodes without add-on codes.

Enable 2-Digit Add-On Code



Disable 2-Digit Add-On Code *



Enable 5-Digit Add-On Code



Disable 5-Digit Add-On Code *



3.3.5.3 Add-On Code Required

When EAN-13 Add-On Code Required is selected, the engine will only read EAN-13 barcodes that contain add-on codes.

EAN-13 Add-On Code Required



EAN-13 Add-On Code Not Required *



3.3.5.4 EAN-13 Beginning with 290 Add-On Code

Required

This setting programs the engine to require an add-on code (2-digit or 5-digit) on EAN-13 barcodes that begin with “290”. The following settings can be programmed:

Require Add-On Code: All EAN-13 barcodes that begin with “290” must have a 2-digit or 5-digit add-on code. The EAN-13 barcode with the add-on code is then transmitted. If the required add-on code is not found, the EAN-13 barcode is discarded.

Do Not Require Add-On Code: If you have selected Require Add-On Code, and you want to disable this feature, scan Do Not Require Add-On Code. EAN-13 barcodes are handled, depending on your selection for the “Add-On Code Required” feature.

Do Not Require Add-On Code *



Require Add-On Code



3.3.5.5 EAN-13 Beginning with 378/379 Add-On Code

Required

This setting programs the engine to require an add-on code (2-digit or 5-digit) on EAN-13 barcodes that begin with a “378” or “379”. The following settings can be programmed:

Require Add-On Code: All EAN-13 barcodes that begin with a “378” or “379” must have a 2-digit or 5-digit add-on code. The EAN-13 barcode with the add-on code is then transmitted. If the required add-on code is not found, the EAN-13 barcode is discarded.

Do Not Require Add-On Code: If you have selected Require Add-On Code, and you want to disable this feature, scan Do Not Require Add-On Code. EAN-13 barcodes are handled, depending on your selection for the “Add-On Code Required” feature.

Do Not Require Add-On Code *



Require Add-On Code



3.3.5.6 EAN-13 Beginning with 414/419 Add-On Code

Required

This setting programs the engine to require an add-on code (2-digit or 5-digit) on EAN-13 barcodes that begin with a “414” or “419”.

The following settings can be programmed:

Require Add-On Code: All EAN-13 barcodes that begin with a “414” or “419” must have a 2-digit or 5-digit add-on code. The EAN-13 barcode with the add-on code is then transmitted. If the required add-on code is not found, the EAN-13 barcode is discarded.

Do Not Require Add-On Code: If you have selected Require Add-On Code, and you want to disable this feature, scan Do Not Require Add-On Code.

EAN-13 barcodes are handled, depending on your selection for the “Add-On Code Required” feature.

Do Not Require Add-On Code *



Require Add-On Code



3.3.5.7 EAN-13 Beginning with 434/439 Add-On Code

Required

This setting programs the engine to require an add-on code (2-digit or 5-digit) on EAN-13 barcodes that begin with a “434” or “439”. The following settings can be programmed:

Require Add-On Code: All EAN-13 barcodes that begin with a “434” or “439” must have a 2-digit or 5-digit add-on code. The EAN-13 barcode with the add-on code is then transmitted. If the required add-on code is not found, the EAN-13 barcode is discarded.

Do Not Require Add-On Code: If you have selected Require Add-On Code, and you want to disable this feature, scan Do Not Require Add-On Code. EAN-13 barcodes are handled, depending on your selection for the “Add-On Code Required” feature.

Do Not Require Add-On Code *



Require Add-On Code



3.3.5.8 EAN-13 Beginning with 977 Add-On Code

Required

This setting programs the engine to require an add-on code (2-digit or 5-digit) on EAN-13 barcodes that begin with “977”. The following settings can be programmed:

Require Add-On Code: All EAN-13 barcodes that begin with “977” must have a 2-digit or 5-digit add-on code. The EAN-13 barcode with the add-on code is then transmitted. If the required add-on code is not found, the EAN-13 barcode is discarded.

Do Not Require Add-On Code: If you have selected Require Add-On Code, and you want to disable this feature, scan Do Not Require Add-On Code. EAN-13 barcodes are handled, depending on your selection for the “Add-On Code Required” feature.

Do Not Require Add-On Code *



Require Add-On Code



3.3.5.9 EAN-13 Beginning with 978 Add-On Code

Required

This setting programs the engine to require an add-on code (2-digit or 5-digit) on EAN-13 barcodes that begin with "978". The following settings can be programmed:

Require Add-On Code: All EAN-13 barcodes that begin with "978" must have a 2-digit or 5-digit add-on code. The EAN-13 barcode with the add-on code is then transmitted. If the required add-on code is not found, the EAN-13 barcode is discarded.

Do Not Require Add-On Code: If you have selected Require Add-On Code, and you want to disable this feature, scan Do Not Require Add-On Code. EAN-13 barcodes are handled, depending on your selection for the "Add-On Code Required" feature.

Do Not Require Add-On Code *



Require Add-On Code



3.3.5.10 EAN-13 Beginning with 979 Add-On Code

Required

This setting programs the engine to require an add-on code (2-digit or 5-digit) on EAN-13 barcodes that begin with "979". The following settings can be programmed:

Require Add-On Code: All EAN-13 barcodes that begin with "979" must have a 2-digit or 5-digit add-on code. The EAN-13 barcode with the add-on code is then transmitted. If the required add-on code is not found, the EAN-13 barcode is discarded.

Do Not Require Add-On Code: If you have selected Require Add-On Code, and you want to disable this feature, scan Do Not Require Add-On Code. EAN-13 barcodes are handled, depending on your selection for the "Add-On Code Required" feature.

Do Not Require Add-On Code *



Require Add-On Code



3.3.6 ISSN

Restore the Factory Defaults of ISSN



Enable ISSN



Disable ISSN*



3.3.6.1 Add-On Code

An ISSN barcode can be augmented with a two-digit or five-digit add-on code to form a new one.

Enable 2-Digit Add-On Code/ Enable 5-Digit Add-On Code:

The engine decodes a mix of ISSN barcodes with and without 2-digit/5-digit add-on codes.

Disable 2-Digit Add-On Code/ Disable 5-Digit Add-On Code:

The engine decodes ISSN and ignores the add-on code when presented with an ISSN plus add-on barcode. It can also decode ISSN barcodes without add-on codes.

Enable 2-Digit Add-On Code



Disable 2-Digit Add-On Code *



Enable 5-Digit Add-On Code



Disable 5-Digit Add-On Code *



3.3.6.2 Add-On Code Required

When ISSN Add-On Code Required is selected, the engine will only read ISSN barcodes that contain add-on codes.

ISSN Add-On Code Required




ISSN Add-On Code Not Required *



3.3.7 ISBN

Restore the Factory Defaults of ISBN



Enable ISBN *



Disable ISBN



3.3.7.1 Set ISBN Format

ISBN-13*



ISBN-10



3.3.7.2 Add-On Code

An ISBN barcode can be augmented with a two-digit or five-digit add-on code to form a new one.

Enable 2-Digit Add-On Code/ Enable 5-Digit Add-On Code:

The engine decodes a mix of ISBN barcodes with and without 2-digit/5-digit add-on codes.

Disable 2-Digit Add-On Code/ Disable 5-Digit Add-On Code:

The engine decodes ISBN and ignores the add-on code when presented with an ISBN plus add-on barcode. It can also decode ISBN barcodes without add-on codes.

Enable 2-Digit Add-On Code



Disable 2-Digit Add-On Code *



Enable 5-Digit Add-On Code



Disable 5-Digit Add-On Code *



3.3.7.3 Add-On Code Required

When ISBN Add-On Code Required is selected, the engine will only read ISBN barcodes that contain add-on codes.

ISBN Add-On Code Required



ISBN Add-On Code Not Required *



3.3.8 UPC-E

Restore the Factory Defaults of UPC-E



Enable UPC-E *



Disable UPC-E



3.3.8.1 Transmit Check Digit

Transmit UPC-E Check
Digit *



Do Not Transmit UPC-E
Check Digit



3.3.8.2 Add-On Code

A UPC-E barcode can be augmented with a two-digit or five-digit add-on code to form a new one.

Enable 2-Digit Add-On Code/ Enable 5-Digit Add-On Code:

The engine decodes a mix of UPC-E barcodes with and without 2-digit/5-digit add-on codes.

Disable 2-Digit Add-On Code/ Disable 5-Digit Add-On Code:

The engine decodes UPC-E and ignores the add-on code when presented with an UPC-E plus add-on barcode. It can also decode UPC-E barcodes without add-on codes.

Enable 2-Digit Add-On Code



Disable 2-Digit Add-On Code *



Enable 5-Digit Add-On Code



Disable 5-Digit Add-On Code *



3.3.8.3 Add-On Code Required

When UPC-E Add-On Code Required is selected, the engine will only read ISBN barcodes that contain add-on codes.

UPC-E Add-On Code Required



UPC-E Add-On Code Not Required *



3.3.8.4 Transmit System Character “0”

The first character of UPC-E barcode is the system character “0”.

Transmit System Character “0” *



Do Not Transmit System Character “0”



3.3.8.5 UPC-E Extension

Disable UPC-E Extend: Transmit UPC-E barcodes as is.

Enable UPC-E Extend: Extend UPC-E barcodes to make them compatible in length to UPC-A.

Enable UPC-E Extend



Disable UPC-E Extend *



3.3.9 UPC-A

Restore the Factory Defaults of UPC-A



Enable UPC-A *



Disable UPC-A



3.3.9.1 Transmit Check Digit

Transmit UPC-A Check
Digit *



Do Not Transmit UPC-A
Check Digit



3.3.9.2 Add-On Code

A UPC-A barcode can be augmented with a two-digit or five-digit add-on code to form a new one.

Enable 2-Digit Add-On Code/ Enable 5-Digit Add-On Code:

The engine decodes a mix of UPC-A barcodes with and without 2-digit/5-digit add-on codes.

Disable 2-Digit Add-On Code/ Disable 5-Digit Add-On Code:

The engine decodes UPC-A and ignores the add-on code when presented with an UPC-A plus add-on barcode. It can also decode UPC-A barcodes without add-on codes.

Enable 2-Digit Add-On Code



Disable 2-Digit Add-On Code *



Enable 5-Digit Add-On Code



Disable 5-Digit Add-On Code *



3.3.9.3 Add-On Code

When UPC-A Add-On Code Required is selected, the engine will only read UPC-A barcodes that contain add-on codes.

UPC-A Add-On Code Required



UPC-A Add-On Code Not Required *



3.3.9.4 Transmit Preamble Character

Preamble characters (Country Code and System Character) can be transmitted as part of a UPC-A barcode. Select one of the following options for transmitting UPC-A preamble to the host device: transmit system character only, or transmit system character and country code ("0" for USA), or transmit no preamble.

System Character & Country Code



System Character *



No Preamble



3.3.10 Interleaved 2 of 5

Restore the Factory Defaults of
Interleaved 2 of 5



Enable Interleaved
2 of 5 *



Disable Interleaved
2 of 5



Set the Minimum
Length for
Interleaved 2 of 5



Set the Maximum
Length for
Interleaved 2 of 5



3.3.10.1 Check Digit Verification

A check digit is optional for Interleaved 2 of 5 and can be added as the last digit. It is a calculated value used to verify the integrity of the data.

Disable: The engine transmits Interleaved 2 of 5 barcodes as is.

Do Not Transmit Check Digit After Verification:

The engine checks the integrity of all Interleaved 2 of 5 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted except the last digit, whereas those failing it will not be transmitted.

Transmit Check Digit After Verification:

The engine checks the integrity of all Interleaved 2 of 5 barcodes to verify that the data complies with the check digit algorithm. Barcodes passing the check will be transmitted, whereas those failing it will not be transmitted.

Disable*



Do Not Transmit Check Digit After Verification



Transmit Check Digit After Verification



Note: If the Do Not Transmit Check Digit After Verification option is enabled, Interleaved 2 of 5 barcodes with a length that is less than the configured minimum length after having the check digit excluded will not be decoded. (For example, when the **Do Not Transmit Check Digit After Verification** option is enabled and the minimum length is set to 4, Interleaved 2 of 5 barcodes with a total length of 4 characters including the check digit cannot be read.)

3.3.10.2 ITF-14

ITF-14 is a special kind of Interleaved 2 of 5 with a length of 14 characters and the last character as the check character.

Restore the Factory Defaults of ITF-14



Disable ITF-14



Enable ITF-14 But
Do Not Transmit
Check Digit *

Enable ITF-14 and
Transmit Check
Digit



Note: It is advisable not to enable ITF-14 and Interleaved 2 of 5 at the same time.

3.3.10.3 ITF-6

ITF-6 is a special kind of Interleaved 2 of 5 with a length of 6 characters and the last character as the check character.

Restore the Factory Defaults of ITF-6



Disable ITF-6 *



Enable ITF-6 But Do Not
Transmit Check Digit



Enable ITF-6 and
Transmit Check Digit



Note: It is advisable not to enable ITF-6 and Interleaved 2 of 5 at the same time.

3.3.11 Matrix 2 of 5

Restore the Factory Defaults of Matrix 2 of 5



Enable Matrix 2 of 5



Disable Matrix 2 of 5 *



Set the Minimum Length
for Matrix 2 of 5



Set the Maximum Length
for Matrix 2 of 5



3.3.11.1 Check Digit Verification

Do Not Transmit Check Digit After
Verification *



Transmit Check Digit After Verification



Disable



3.3.12 Industrial 2 of 5

Restore the Factory Defaults of Industrial 2 of 5



Enable Industrial 2 of 5 *



Disable Industrial 2 of 5



Set the Minimum Length
for Industrial 2 of 5



Set the Maximum Length
for Industrial 2 of 5



3.3.12.1 Check Digit Verification

Do Not Transmit Check Digit After
Verification



Transmit Check Digit After Verification



Disable *



3.3.13 Standard 2 of 5 (IATA 2 of 5)

Restore the Factory Defaults of Standard 25



Enable Standard 25 *



Disable Standard 25



Set the Minimum Length
for Standard 25



Set the Maximum Length
for Standard 25



3.3.13.1 Check Digit Verification

Do Not Transmit Check Digit After
Verification



Transmit Check Digit After Verification



Disable *



3.3.14 Code 39

Restore the Factory Defaults of Code 39



Enable Code 39 *



Disable Code 39



Do Not Transmit
Start/Stop Character *



Transmit Start/Stop
Character



Set the Minimum Length
for Code 39



Set the Maximum Length
for Code 39



3.3.14.1 Check Digit Verification

Do Not Transmit Check Digit After
Verification



Transmit Check Digit After Verification



Disable *



3.3.14.2 Enable/Disable Code 39 Full ASCII

The engine can be configured to identify all ASCII characters by scanning the appropriate barcode below.

Enable Code 39 Full ASCII * Disable Code 39 Full ASCII



3.3.15 Code 32

Code 32 is a variant of Code 39 used by the Italian pharmaceutical industry. Scan the appropriate bar code below to enable or disable Code 32. Code 39 must be enabled and Code 39 check digit verification must be disabled for this parameter to function.

Disable Code 32 *



Enable Code 32



3.3.15.1 Code 32 Prefix

Scan the appropriate bar code below to enable or disable adding the prefix character "A" to all Code 32 barcodes. Code 32 must be enabled for this parameter to function.

Disable Code 32 Prefix * Enable Code 32 Prefix



3.3.15.2 Transmit Code 32 Check Digit

Code 32 must be enabled for this parameter to function.

Do Not Transmit Code
32 Check Digit *



Transmit Code 32
Check Digit



3.3.15.3 Transmit Code 32 Start/Stop Character

Code 32 must be enabled for this parameter to function.

Do Not Transmit Code 32
Start/Stop Character *



Transmit Code 32
Start/Stop Character



3.3.16 Codabar

Restore the Factory Defaults of Codabar



Enable Codabar *



Disable Codabar



Set the Minimum Length
for Codabar



Set the Maximum Length
for Codabar



3.3.16.1 Check Digit Verification

Disable *



Transmit Check Digit After
Verification



Do Not Transmit Check Digit After
Verification



3.3.16.2 Transmit Start/Stop Character

Do not Transmit Start/Stop
Character *



Transmit Start/Stop Character



3.3.16.3 Start/Stop Character Format

You can choose your desired start/stop character format by scanning the appropriate barcode below.

ABCD/ABCD as the
Start/Stop Character *



ABCD/TN*E as the
Start/Stop Character



Start/Stop Character in
Uppercase



Start/Stop Character in
Lowercase



3.3.17 Code 93

Restore the Factory Defaults of Code 93



Enable Code 93 *



Disable Code 93



Set the Minimum Length
for Code 93



Set the Maximum Length
for Code 93



3.3.17.1 Check Digit Verification

Disable



Transmit Check Digit After
Verification



Do Not Transmit Check Digit After
Verification *



3.3.18 GS1-Databar (RSS)

Restore the Factory Defaults of GS1-Databar



Enable GS1-Databar *



Disable GS1-Databar



3.3.18.1 Transmit Application Identifier "01"

Transmit Application Identifier "01" *



Do Not Transmit Application Identifier "01"



3.3.19 Code 11

Restore the Factory Defaults of Code 11



Enable Code 11 *



Disable Code 11



Set the Minimum Length
for Code 11



Set the Maximum Length
for Code 11



3.3.19.1 Transmit Check Digit

Transmit Check Digit



Do Not Transmit Check
Digit *



3.3.19.2 Check Digit Verification

Disable



One Check Digit, MOD11 *



Two Check Digits,
MOD11/MOD11



Two Check Digits,
MOD11/MOD9



One Check Digit, MOD11
(Len<=10)
Two Check Digits,
MOD11/MOD11 (Len>10)



One Check Digit, MOD11
(Len<=10)
Two Check Digits,
MOD11/MOD9 (Len>10)



3.3.20 Plessey

Restore the Factory Defaults of Plessey



Enable Plessey *



Disable Plessey



Set the Minimum Length
for Plessey



Set the Maximum Length
for Plessey



3.3.20.1 Check Digit Verification

Do Not Transmit Check Digit After Verification *



Transmit Check Digit
After Verification



Disable



3.3.21 MSI-Plessey

Restore the Factory Defaults of MSI-Plessey



Enable MSI-Plessey *



Disable MSI-Plessey



Set the Minimum Length
for MSI-Plessey



Set the Maximum Length
for MSI-Plessey



3.3.21.1 Transmit Check Digit

Transmit Check Digit



Do Not Transmit Check
Digit *



3.3.21.2 Check Digit Verification

One Check Digit, MOD10 *



Disable



Two Check Digits,
MOD10/MOD10



Two Check Digits,
MOD10/MOD11



3.3.22 JAN

3.3.22.1 JAN Code for Magazines

Japanese Article Number (JAN) is a barcode standard compatible with the EAN. JAN barcodes for magazines are EAN-13 barcodes starting with a "491" and containing a 5-digit add-on code. Scan the appropriate barcode below to enable or disable JAN barcodes for magazines.

Enable JAN Code for
Magazines



Disable JAN Code for
Magazines *



3.3.22.2 JAN Code for Books

JAN barcodes for books include an ISBN barcode starting with a "978" and an EAN-13 barcodes starting with a "191" or "192". When left on the default setting (Disable JAN Code for Books), the engine treats the ISBN and EAN-13 barcodes as single barcodes.

When enabled, the engine must see and read the ISBN and EAN-13 barcodes in a single read to transmit the data. No data is output unless both barcodes are read.

Enable JAN Code for
Books



Disable JAN Code for
Books *



You may select either of the following ways to transmit JAN barcodes for books.

If you scan the **Do Not Require Concatenation** barcode, the engine transmits the ISBN and EAN-13 barcodes as separate symbologies.

If you scan the **Require Concatenation** barcode, the engine transmits the ISBN and EAN-13 barcodes as an ISBN barcode.

Require Concatenation



Do Not Require Concatenation *



A separator (a comma “,”) can be inserted between the ISBN and EAN-13 barcodes. Note that the Require Concatenation feature must be enabled for this setting to function.

Enable Barcode Separator



Disable Barcode Separator *



3.4 2D

3.4.1 PDF 417

Restore the Factory Defaults of PDF 417



Enable PDF 417 *



Disable PDF 417



Set the Minimum Length
for PDF 417



Set the Maximum Length
for PDF 417



3.4.1.1 PDF 417 Twin Code

PDF417 twin code is 2 PDF417 barcodes paralleled vertically or horizontally. They must both be either regular or inverse barcodes. They must have similar specifications and be placed closely together.

There are 3 options for reading PDF417 twin codes:

Single PDF417 Only: Read either PDF417 code.

Twin PDF417 Only: Read both PDF417 codes.

Both Single & Twin: Read both PDF417 codes. If successful, transmit as twin PDF417 only. Otherwise, try single PDF417 only.

Single PDF417 Only



Twin PDF417 Only



Both Single & Twin



3.4.1.2 Character Encoding

Default Character
Encoding *



UTF-8



3.4.1.3 Enable/Disable PDF417 ECI Output

Disable PDF417 ECI
Output



Enable PDF417 ECI
Output *



3.4.2 QR Code

Restore the Factory Defaults of QR Code



Enable QR Code *



Disable QR Code



Set the Minimum Length
for QR Code



Set the Maximum Length
for QR Code



3.4.2.1 Micro QR

Disable Micro QR *



Enable Micro QR



3.4.2.2 QR Twin Code

QR twin code is 2 QR barcodes paralleled vertically or horizontally. They must both be either regular or inverse barcodes. They must have similar specifications and be placed closely together.

There are 3 options for reading QR twin codes:

Single QR Only: Read either QR code.

Twin QR Only: Read both QR codes.

Both Single & Twin: Read both QR codes. If successful, transmit as twin QR only. Otherwise, try single QR only.

Single QR Only *



Twin QR Only



Both Single & Twin



3.4.2.3 Character Encoding

Default Character
Encoding *



UTF-8



3.4.2.4 Enable/Disable QR ECI Output

Enable QR ECI Output *



Disable QR ECI Output



3.4.3 Data Matrix

Restore the Factory Defaults of Data Matrix



Enable Data Matrix *



Disable Data Matrix



Set the Minimum Length
for Data Matrix



Set the Maximum Length
for Data Matrix



3.4.3.1 Rectangular Barcode

Enable Rectangular
Barcode *



Disable Rectangular
Barcode



3.4.3.2 Mirror Image

Decode Mirror Images *



Do Not Decode Mirror
Images



3.4.3.3 Data Matrix Twin Code

Data Matrix twin code is 2 Data Matrix barcodes paralleled vertically or horizontally. They must both be either regular or inverse barcodes. They must have similar specifications and be placed closely together.

There are 3 options for reading Data Matrix twin codes:

Single Data Matrix Only: Read either Data Matrix code.

Twin Data Matrix Only: Read both Data Matrix codes. Transmission order:
Data Matrix code on the left (in the upper position)
followed by the one on the right (in the lower position).

Both Single & Twin: Read both Data Matrix codes. If successful, transmit as twin Data Matrix only. Otherwise, try single Data Matrix only.

Single Data Matrix Only *



Twin Data Matrix Only



Both Single & Twin



3.4.3.4 Character Encoding

Default Character Encoding *



UTF-8



3.4.3.5 Enable/Disable Data Matrix ECI Output

Enable Data Matrix ECI Output *



Disable Data Matrix ECI Output



3.4.4 Chinese Sensible Code

Restore the Factory Defaults of Data Matrix



Disable Chinese Sensible Code *



Enable Chinese Sensible Code



Set the Minimum Length for Chinese Sensible Code



Set the Maximum Length for Chinese Sensible Code



3.4.4.1 Enable/Disable Chinese Sensible Code ECI

Output

Enable Chinese Sensible Code ECI Output *



Disable Chinese Sensible Code ECI Output



Chapter 4 – Command Settings

4.1 Operation Mode

4.1.1 Auto

Scan below bar code for auto mode setting

Auto Mode*



4.1.2 Batch

Scan below bar code for batch mode setting

Batch Mode



4.1.3 Wedge

Scan below bar code for wedge mode setting

Wedge Mode



4.2 System setting

4.2.1 Default

Scan below bar code to restore the factory setting

Factory Default



4.2.2 Display FW version / Data Format


Scan below bar code to show the current F/W & BT version

FW version




4.2.3 Auto Power Off

Scan below bar code to set the time frame for auto power off

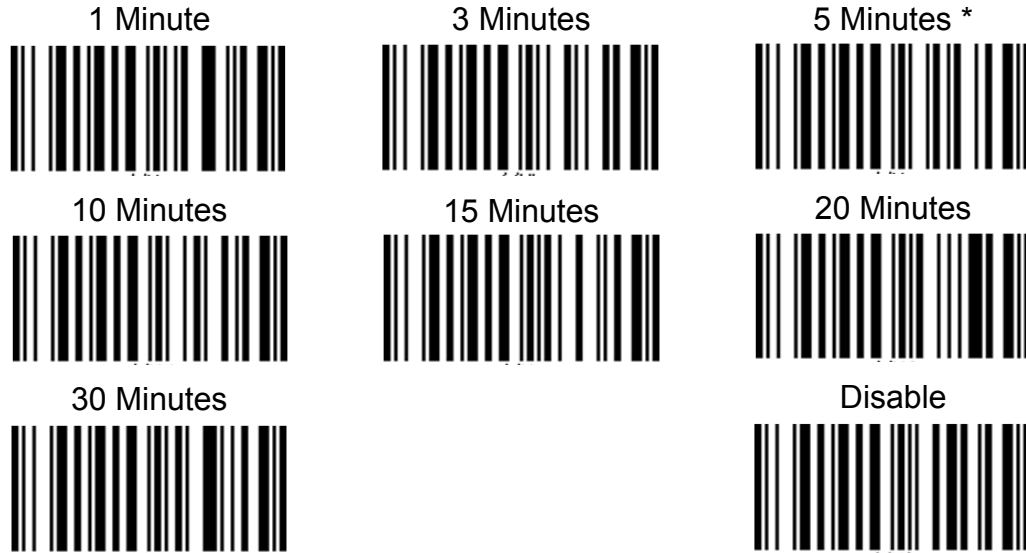

4.2.4 Power Saving

Scan below bar code to set the time frame for power saving.

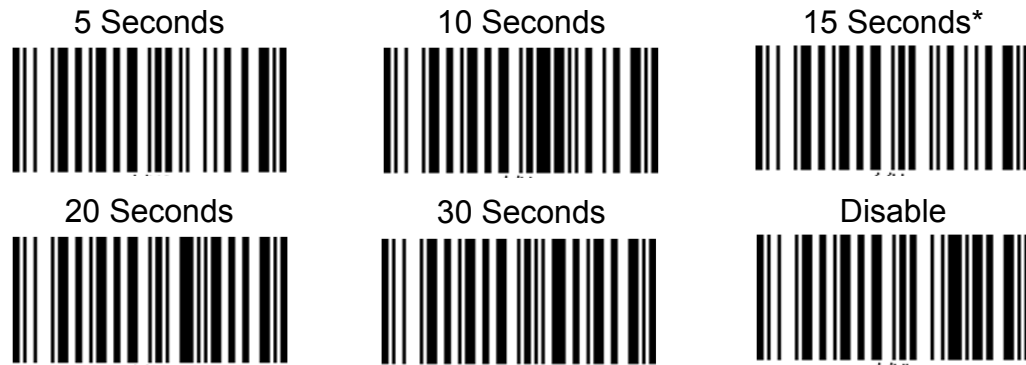

4.3 RF Config.

4.3.1 Paired device info.

Scan below bar code to show the current paired device information

Paired Device



4.3.2 Remove the pair

Scan below bar code to remove pair

Remove Pair



4.4 Data & Memory

4.4.1 Send Batch

Scan [\[Batch\]](#) to switch from Auto Mode to Batch Mode. Data will now be stored in the internal memory of the MS926P and the MS926P will no longer transmit data via RF. Scan below barcode to send data from the MS926P to your host device after collecting the data in Batch Mode. Scan [\[Auto\]](#) to switch back to Auto Mode.

Send Batch



4.4.1.1 Erase last memory entry

Scan below bar code to erase last scanned data in memory

Erased Last Memory Entry



4.4.1.2 Erase all data in buffer (Erase Memory)

Scan below bar code to erase all data in the memory

Erase Memory



4.4.1.3 Check buffer memory space

Scan below bar code to check buffer memory space

Free Memory Space



4.5 Data Sending Block Delay

Scan below bar code to set the block delay time. Default is 10ms.

10 ms*



50 ms



100 ms



500 ms



1 Sec.



3 Sec.



4.6 HID Keyboard Character Delay

Scan below bar code to set HID keyboard character delay time. Default is 1ms.

1 ms *



5 ms



10 ms



20 ms



50 ms



100 ms



4.6.1 HID keyboard Case

Scan below bar code to change the alphabet case. Scan "to lower" barcode to output data in lower case; or scan "to upper" barcode to output data in upper case. Default setting: "auto trace" to have original scanned data transmitted.

Auto Trace *



To Lower












To Upper



4.6.2 HID keyboard language

Scan below bar code to change keyboard language. Default is US English

US English *	UK English	Swiss
		
Swedish	Norwegian	Italian
		
German	French	Danish
		
Partial ALT	Japanese (OADG109)	Spanish
		
ALT Mode		
		

4.7 Beep & Vibration & Indicators

4.7.1 Beep Control

Scan below bar code to adjust beep volume. Default: Medium volume

4.7.1.1 High volume

High Volume



4.7.1.2 Medium volume *

Medium Volume*



4.7.1.3 Low volume

Low Volume



4.7.1.4 Mute

Mute



4.7.2 Vibration

The vibration is off in default. Scan below bar code to open vibration function

Enable Vibrator



Disable Vibrator *



4.7.3 Beep & Vibration Setting manually


Please follow the steps to set up the Beep & Vibration.

- Main Menu → Beep & Vibrate → Indicators → Button

- Beeper & Vibrator *
- None
- Beeper
- Vibrator

4.7.4 Indicators

4.7.4.1 Good Read Indicator

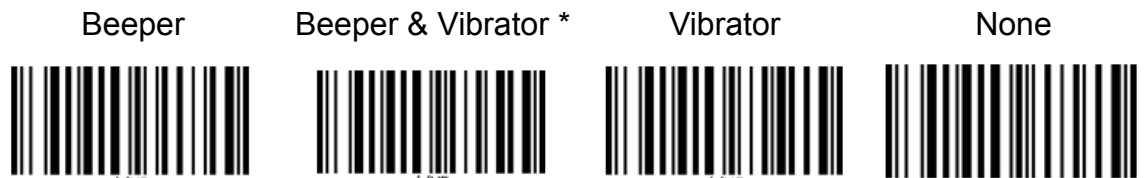

4.7.4.2 Button Indicator



4.7.4.3 System Setting Indicator

Beeper *	Beeper & Vibrator	Vibrator	None

4.7.4.4 System Warning/Error Indicator

Beeper *	Beeper & Vibrator	Vibrator	None

4.7.4.5 Power On Indicator

Beeper	Beeper & Vibrator *	Vibrator	None

4.7.4.6 Power Off Alarm

Beeper	Beeper & Vibrator *	Vibrator	None

4.8 Data Terminator

Scan below bar code to set up terminator.

None



CR*



CRLF



LF




TAB



4.9 1:1 / 1:N Checking Indicators


4.9.1 1:1/1:N Checking Pass Indicator

Scan below bar code to indicate 1:1/1:N Checking Pass.

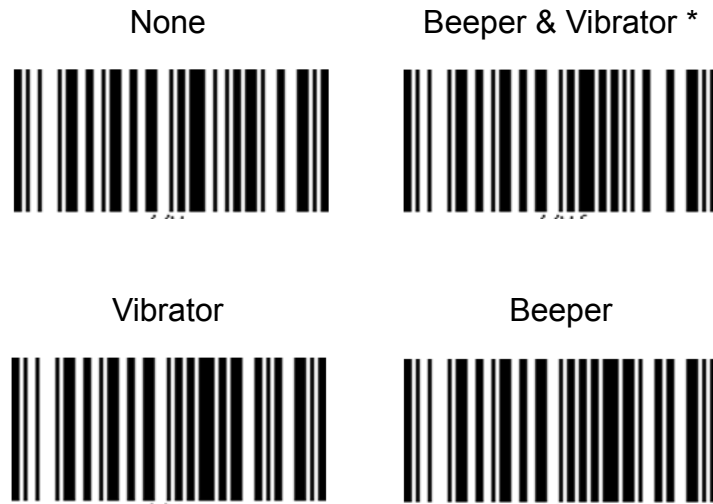

4.9.2 1:1/1:N Checking Fail Indicator

Scan below bar code to indicate 1:1/1:N Checking Fail.

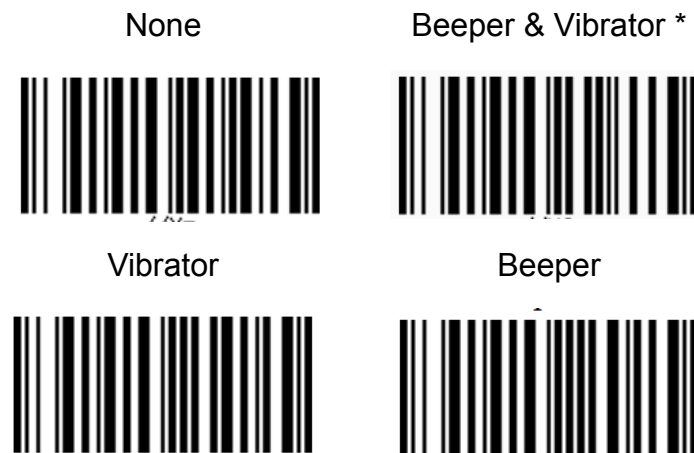

4.9.3 Pause Scan When 1:1/1:N Checking Fail

Scan below bar code to indicate pause scan when 1:1/1:N Checking Fail.

Enable



Disable *



4.9.4 1:1/1:N Checking Screen Indicator

Scan below bar code to indicate 1:1/1:N Screen Checking.

Enable



Disable *

