




The Unitech MS916 1D Laser Companion Scanner

SETUP AND PAIRING

The following steps will help you pair the MS916 to a host device.

STEP 1:

CONNECT AND CHARGE

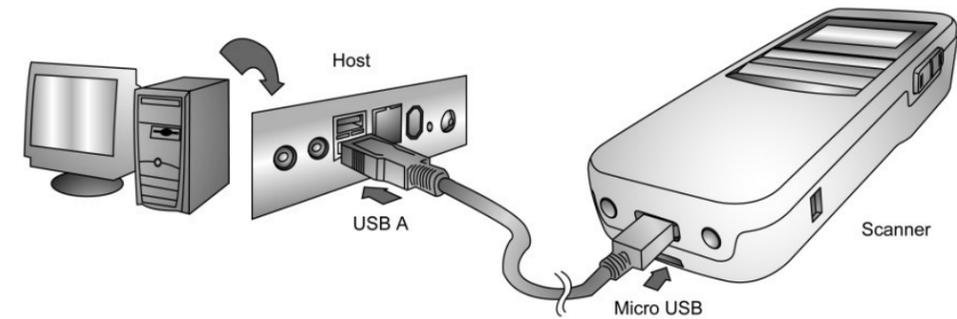

Insert the Micro USB cord into the scanner and into a USB port on the host PC. Charge for 4 hours.

STEP 2: ENABLE BLUETOOTH ON HOST

Go to your host device (phone/tablet/computer) settings and turn the Bluetooth function on.

Hold the down button and press the blue scan key to enter pairing mode.



You can also enter pairing mode by scanning this barcode:



Select "MS916" in the Bluetooth settings of your host device. Your host device is now paired to the MS916.

TEST & FINISH

Open a word processing program or app such as Microsoft Word or Notepad on your host. Now scan the following barcode:



If the word "Unitech" appears on the screen you have successfully installed your scanner. Congratulations!

SETTINGS AND CONFIGURATION

The following section covers the most common configuration settings for your MS916 scanner. **They are optional.**

For additional configuration options please visit unitechscanners.com/MS916 and select the "Download" tab. You will find the User's Manual and a variety of other resources.

SWITCH TO BATCH MODE



Scan here to enable memory mode for batch scanning. All scans will be stored in the internal memory.

BLUETOOTH MODE



Scan this barcode to return to Bluetooth Mode. All barcode data will be pushed out to the host.

AUTO MODE



Scan this barcode to enable the MS916 to switch from Bluetooth to Batch mode automatically. If the MS916 loses BT connection, it will automatically start saving barcodes in the internal memory.

ERASE ALL DATA



Scan this barcode to erase all scan entries stored in the internal memory. Please note: all data will be lost.

ERASE LAST SCAN



Scanning this barcode will erase the last scan from the internal memory.

SEND DATA



If you're finished scanning and wish to send the data to your application or software, simply plug the MS916 into your computer using the USB cable and scan this barcode.

FACTORY DEFAULT



Scan here to reset all settings back to the factory default.

HOW CAN WE HELP YOU?

The MS916 should be recognized as a generic HID device by your host device, similar to a standard keyboard. This allows you to scan into any field that you could normally type into.

Unitech's professional support team is available to quickly answer questions or technical-related issues. Should equipment issues occur, please contact a Unitech Support Engineer at (800) 861-8648 for more information.